

MICO Electronic auxiliary circuit, 4 channels IN: 24VDC OUT: 24V/1-2-3-4ADC

4 channels

Current adjustment 1, 2, 3, 4 A

Image

- Fire protection (EN 60950-1)
- Supply voltage protection (EN 61131-2)
- Operating condition capacity (EN 61131-1)

Approvals**Technical Data**

Nominal input voltage	24 V DC
Supply voltage range	18...30 V DC
Number of channels	4 channels
Current adjustment	1 A, 2 A, 3 A, 4 A
Operation	countersunked, sealed
Nominal output voltage	semiconductor switch 24 V DC
Group alarm output	potential free alarm output 30 V AC/DC, 100 mA
Remote restart (ON)	switched positive 100 ms


General data

Connection	Spring clamp terminals
Input terminals	2 x 16 mm ²
Output terminals	per output 1 x 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	double terminals and standard combs
Mounting method	for DIN-rail mounting (TH35) acc. to EN 60715
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Dimensions H x W x D	90 x 70 x 80 mm

Commercial data

Gross weight	160,000
Net weight	160,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85369085
Unit (piece)	1,000
Limited value	1,000

Circuit diagram

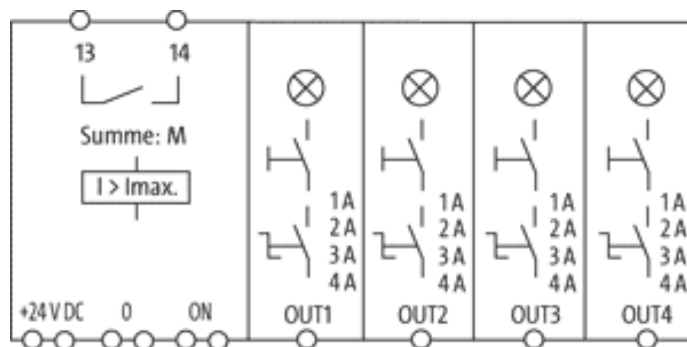

Dimension drawing

