

MICO Electronic auxiliary circuit, 2 channels IN: 24VDC OUT: 24V/1-2-3-4ADC

2 channels
Current adjustment 1, 2, 3, 4 A

Image

- Fire protection (EN 60950-1)
- Supply voltage protection (EN 61131-2)
- Operating condition capacity (EN 61131-1)

Approvals**Technical Data**

Nominal input voltage	24 V DC
Supply voltage range	18...30 V DC
Number of channels	2 channels
Current adjustment	1 A, 2 A, 3 A, 4 A
Operation	countersunked, sealed
Nominal output voltage	semiconductor switch 24 V DC
Group alarm output	potential free alarm output 30 V AC/DC, 100 mA
Remote restart (ON)	switched positive 100 ms

General data

Connection	Spring clamp terminals
Input terminals	1 x 16 mm ²
Output terminals	per output 1 x 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	double terminals and standard combs
Mounting method	for DIN-rail mounting (TH35) acc. to EN 60715
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Dimensions H x W x D	90 x 36 x 80 mm


Commercial data

Gross weight	90,000
Net weight	90,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85369085
Unit (piece)	1,000
Limited value	1,000

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/10

Circuit diagram

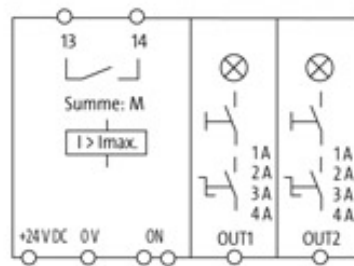

Dimension drawing

