

M12 female straight shielded field-wireable b-cod 5pin (for PROFIBUS take 7000-14025)

Female M12, straight
field-wireable, screw terminals
B-coded, 5-pole, shielded

Image**Form****Technical Data**

| | |
|------------------------------------|---|
| Operating voltage | max. 125 V AC/DC |
| Supply current per contact (40 °C) | max. 4 A |
| Connection diameter | max. 0.75 mm ² |
| Clamping range (cable diameter) | 6...8 mm |
| Housing | CuZn, nickel plated |
| Protection | IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -40...+85 °C |

Commercial data


| | |
|-----------------------|----------|
| Gross weight | 60 |
| Net weight | 60 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85369010 |
| Unit (piece) | 1 |
| Limited value | 1 |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/11

Contact layout

Female

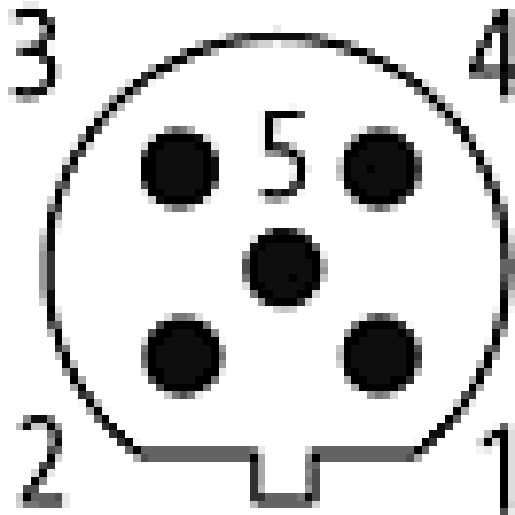

Circuit diagram

