


M12 male 0° A-cod. screw terminal

4-pol., max. 0,75mm², 4 - 6mm


Male straight  
M12, 4-pole  
Screw terminals  
Sealing range (cable Ø): 4...6 mm  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

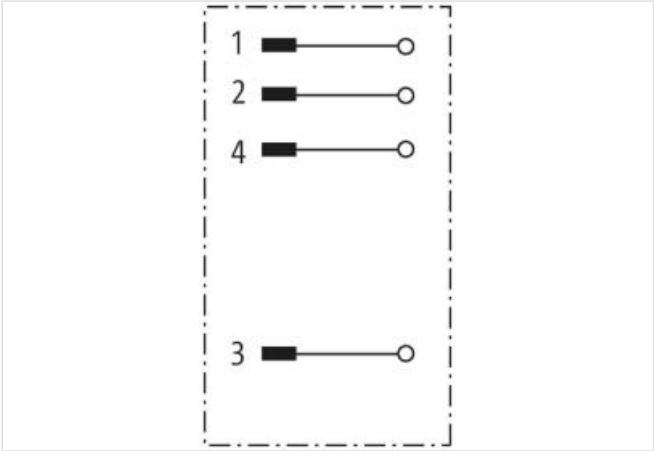

Product may differ from Image

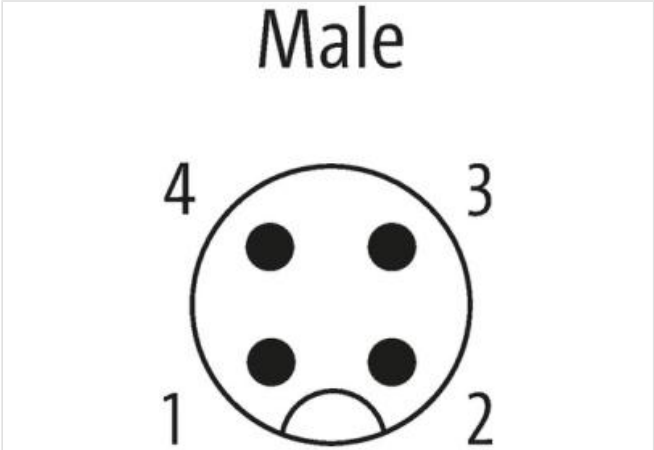

Technical Data	
Operating voltage	max. 250 V
Operating current per contact	max. 4 A
No. of poles	4-pole
Connection cross section	max. 0.75 mm²

Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Copper alloy
Compression gland	M12 (0.6 Nm, SW18)
Isolation resistance	$\geq 100 \text{ M}\Omega$
Contact resistance	$\leq 8 \text{ m}\Omega$
Over voltage category	II

**General data**

Material contact	Copper alloy
Material contact surface	gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material housing	PBT GF
Connection	Screw terminal