

M12 male 0° B-cod. screw terminal shielded2-pol., max. 0.75mm², 6 - 8mm, shielded

PROFIBUS

Male straight

M12, 2-pole

B-coded

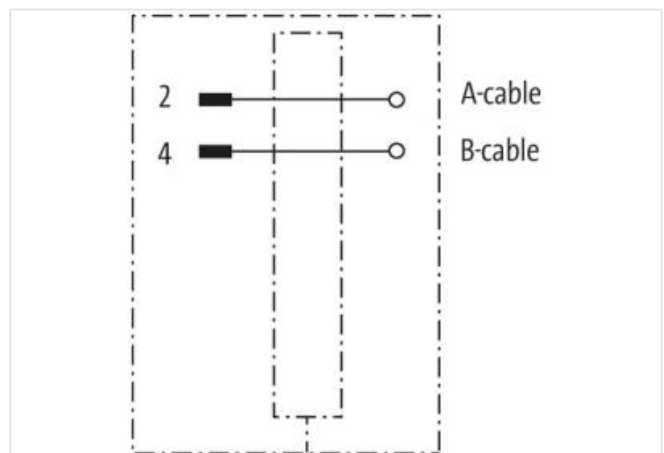
shielded

Screw terminals

Sealing range (cable Ø): 6...8 mm

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range	-25...+85 °C
-------------------	--------------