



M12 female 90° B-cod. screw terminal shielded

5-pol., max. 0.75mm², 6 - 8mm, shielded


PROFIBUS, Interbus
Female 90°
M12, 5-pole
B-coded
shielded
Screw terminals
Sealing range (cable Ø): 6...8 mm

Link to Product

Illustration

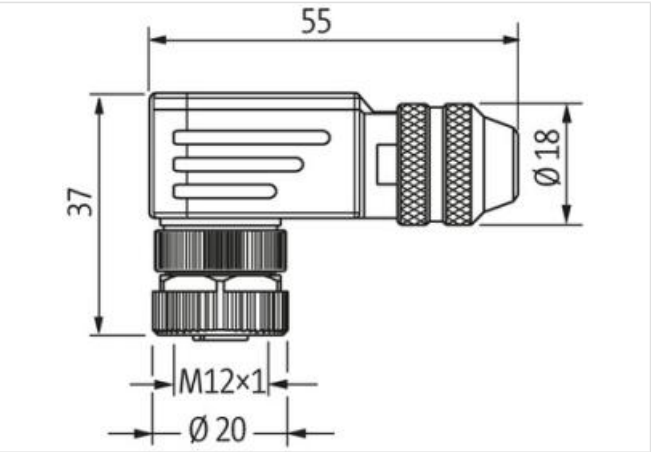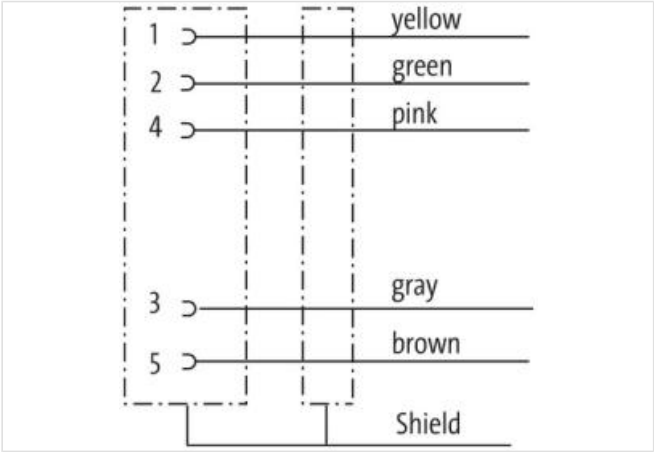

Product may differ from Image

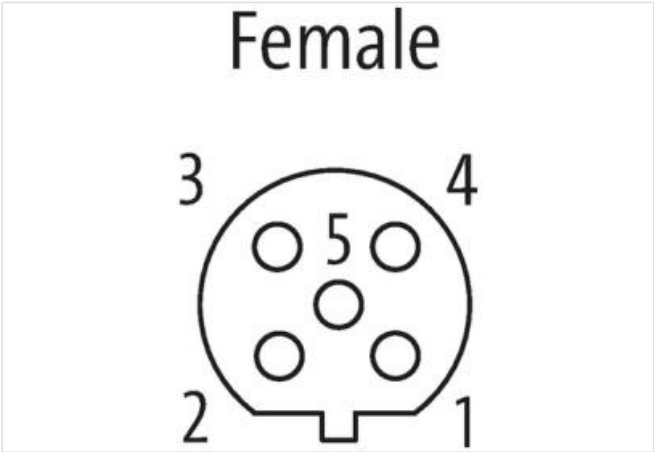

Technical Data	
Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated
General data	
Temperature range	-40...+85 °C

