

Modlink MSDD front panel interface frame modul single metal matte nickel plated/transparent

Frame: metal, matte nickel plated


Lid: plastic, transparent

Image

Vicarious picture

General data	
Shielded	yes, only with shielded inserts
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	zinc die-casting, with surface finishing
suitable for mounting with wall thickness	1...5 mm
Outer dimensions H × W × D	120 × 66 × 32...62 mm (element dependent)
Commercial data	
Net weight	175
Weight unit	gram
Basic unit	pc.
Customs tariff number	85389099
Unit (piece)	1
Limited value	1

Dimension drawing

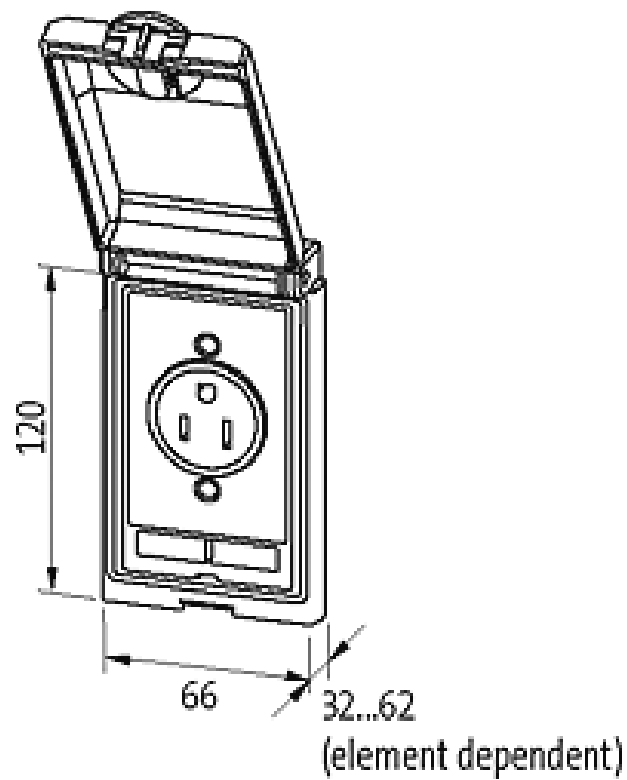

Control cabinet cut-out

